


Batch Inkjet Coder



1. Intelligent – Embedded Intelligent operation system. Support Wi-Fi connection for remote control. Support USB flash disk database and external real-time variable database printing.
2. High Cost Performance – HP Original imported inkjet engine, low cost and high quality printing performance. HP original imported ink, suitable for all kinds of materials and industries.
3. Portable – Separated design with Vernier device, easy to install, support 1-2pcs printhead setting.
4. Efficient – New aluminium alloy cover with good heat dissipation, suit for long time working.
5. Industrial Design – 5 inches high definition resistive touch screen, anti-interference and durable. Aluminium alloy cover, artistic and fashion.
6. Worry Free – Simple operation, non-maintenance. One year free warranty and lifetime maintenance.

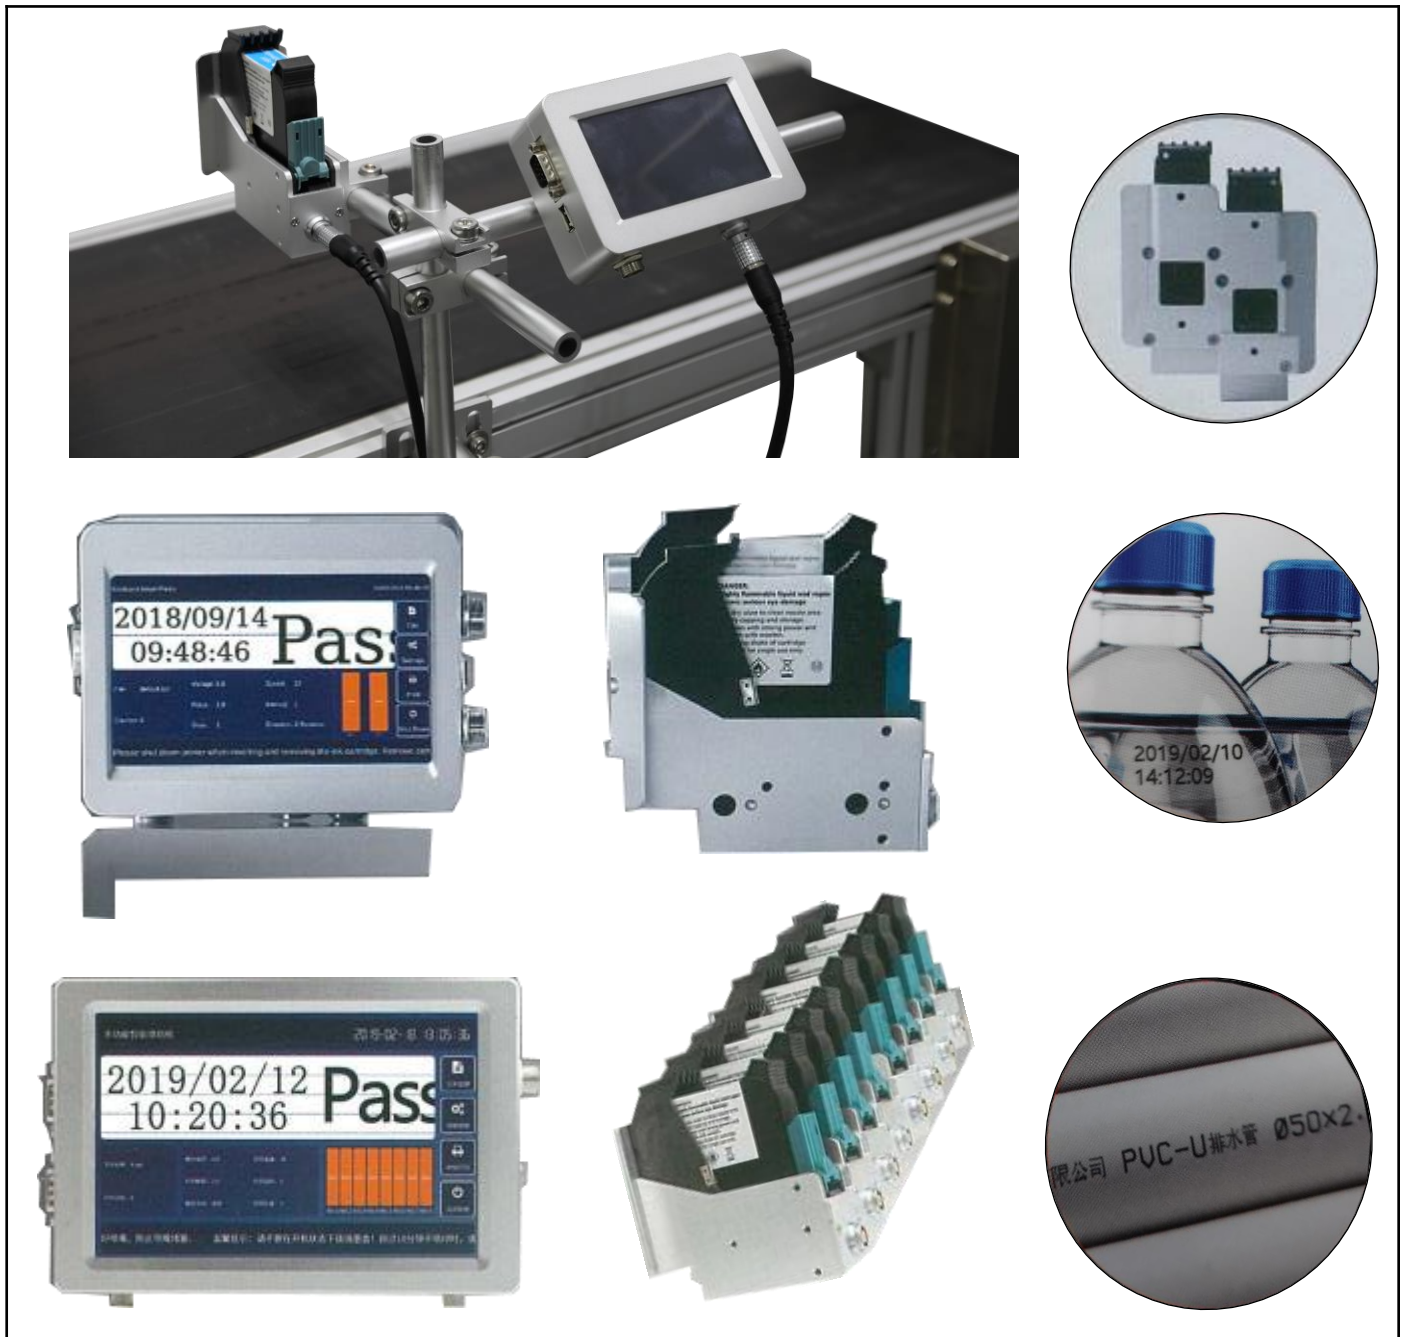

UTOC (SINGAPORE) PTE LTD

BLOCK 2 , SKYTECH #08-19 , BUKIT BATOK ST 24 SINGAPORE 659480

TEL: (65) 6565 7477 FAX: (65) 6565 9454

EMAIL: office@utoc.sg WEBSITE: www.utoc.sg

Model	P-JET - Basic 100	P-JET - Basic 200	P-JET - Basic 400	P-JET - Basic 800
Print Head	Thermal Inkjet 2.5 / Quad core 1.4GHz			
Interface	USB, RS232, Wifi, LAN (Customizable)			
Language	Chinese, English, Turkish, Arabic, Korean, Spanish, French, Portuguese, Russian, German			
Print Distance	Best quality with 2-5mm			
Print Resolution	600dpi Maximum			
Print Height	1mm Minimum, 12.7mm Maximum	1mm Minimum, 25.4mm Maximum	1mm Minimum, 50.8mm Maximum	1mm Minimum, 101.6mm Maximum
Screen Size	4.3 Inches Color Screen	5 Inches Color Screen	7 Inches Color Screen	10.1 Inches Color Screen
Ink Type	Water-based/42ml, Solvent/42ml			Bulk ink cartridge, Waterbased/42ml, Solvent/42ml
Ink Color	Black, White, Red, Blue, Yellow, Green, Invisible, UV			
Print Content	Chinese, English, Numbers, Symbols, QR code, Bar code, Pictures, Dates, Counter, Variable data			
Print Media	Boards, Carton, Stone, Pipe, Cable, Metal, Plastic, Electronic, Automotive Parts			
Adapter	AC input 100~240V; DC output 16.8V/2A	AC input 220V \pm 20%; DC output 30V/10A		
Material Of Printer	Aluminium Alloy			
Dimension	Controller 128 x 86 x 42mm, Printhead 100 x 100 x 34mm	Controller 130 x 100 x 42mm, Printhead 90 x 110 x 107mm	Controller 185 x 125 x 34mm, Printhead 138 x 100 x 136mm	Controller 263 x 166 x 45mm, Printhead 276 x 100 x 184mm
Weight	Controller 0.45kg, Printhead 0.25kg	Controller 0.5kg, Printhead 0.5kg	Controller 0.58kg, Printhead 0.28kg x 4	Controller 1.45kg, Printhead 0.28kg x 8
Operational Environment	Temperature 0-45°C (The best: 20-30°C) Humidity 40%-60% Rh			



UTOC (SINGAPORE) PTE LTD

BLOCK 2 , SKYTECH #08-19 , BUKIT BATOK ST 24 SINGAPORE 659480

TEL: (65) 6565 7477 FAX: (65) 6565 9454

EMAIL: office@utoc.sg WEBSITE: www.utoc.sg